

Eaton's heritage in industry-leading UPS design and production



For more than 50 years, Eaton has been safeguarding the critical systems of businesses across the globe. Whether protecting a single desktop or the largest data centre, Eaton solutions provide clean, uninterrupted power to keep mission-critical applications working.

We offer a comprehensive range of environmentally-sensitive, efficient, reliable UPSs, surge protective devices, power distribution units (PDUs), remote monitoring, meters, software, connectivity, enclosures, airflow management and professional services.

We work with IT and facilities managers to effectively manage power in virtually every business segment, including data centres, retail outlets, healthcare organisations, governmental agencies, manufacturing firms, broadcasting companies, financial institutions, and a wide variety of other applications.

Our solutions provide the power to make a difference, helping you achieve your business goals while maintaining environmentally sustainable enterprises. A world-class support structure

As an industry-leading UPS provider, at Eaton we're constantly working to ensure that our service standards meet your needs precisely. Our trained service team is on hand 24/7 to minimise risks by detecting and addressing problems before they happen. In the Asia-Pacific region, this service network consist of field engineers who receive comprehensive, upto-date training on the latest products and technologies.

The experience and know-how of our servicing resources provide a dedicated support package which helps to ensure your equipment is running safely, reliably, sustainably and energy-efficiently at all times.



Committed to creating and maintaining powerful custome relationships based on a foundation of excellence.

Eaton 93PR UPS 125-200 kW

Lowest total cost of ownership and maximum availability – taking scalability, resiliency, safety and efficiency to the next level.

The most advanced UPS in its power range, the Eaton 93PR is ideal for small to mid-sized data centres and other mission critical applications where efficiency, reliability, safety and scalability are essential.

Future-ready

The rapid adoption of the cloud, constant evolution of IT technologies, increased focus on environmental footprint and sophistication of mission critical applications is demanding even more efficient, resilient, scalable and safe power protection solutions.

The new levels of efficiency and scalability offered by the 93PR minimise Total Cost of Ownership while the safety and resiliency, both in infrastructure and IT layers, maximise availability and ensure business continuity.

All-round value

Available in 200kW frame sizes, the 93PR's modular de sign enables it to suit a wide range of requirements. And, whichever one you choose, you can be sure it will provide the lowest Total Cost of Ownership combined with maximum availability, for cost-efficient business continuity.

Ensuring that you can always access the power your mission-critical application requires – under all circumstances – without compromising business performance or safety, the 93PR is the most efficient, scalable, Cloud-ready and safe UPS you can choose.



Safety

Ensuring safety in any electrical installation is a must. Safe hot-swappable design and in-built back-feed protection ensures safety and compliance with regulations.





Efficiency



With high efficiency being translated into reduced electrical and cooling losses, the 93PR helps to minimise operational expenditure costs, in addition to addressing the cost pressures resulting from commoditisation of IT services. Increased efficiency also leads to higher sustainability, through reduced carbon emissions.

Scalability



Scalability helps to optimise capital expenditure by only deploying additional equipment when necessary and providing additional flexibility to respond to your changing needs. The scalability of the 93PR also provides increased flexibility to accommodate the changing requirements of rapidly evolving technologies.

Resiliency, virtualisation & cloud-readiness

The ability of a system to absorb faults and still remain in its desired operational state is paramount to minimising costly downtime. The 93PR takes resiliency to the next level by bridging electrical and IT infrastructures.



Maximum Energy Efficiency Lowest TCO

The Eaton 93PR is simply the most efficient UPS in its class, offering the lowest Total Cost of Ownership. Thanks to Eaton's advanced algorithms and energy - saving features, the 93PR achieves up to 99% efficiency. This efficiency is well proven with installations in major datacentre hubs in the Asia Pacific region and around the world.

99% efficiency - Energy Saver System (ESS)

Improves the 93PR efficiency levels to 99%, by suspending the power modules when power conditioning is not required.

The power is fed through the static bypass switch, and in the event of exceeding pre-set input limits the UPS is ready to switch to double-conversion mode in under two milliseconds. In addition to extremely low losses, the ESS mode provides filtering against fast low-energy transients. It is simply the most advanced, most reliable, fastest-reacting energy-saver architecture available.

In addition to saving energy, this technology enhances the reliability of the system by reducing electrical stress in the power electronic components, extending the UPS life time and thus reducing total cost of ownership.

Load (% of nominal)

Optimised double conversion efficiency - Variable Module Management System (VMMS)

For applications where ESS may not be optimal, for example with very low quality mains, VMMS technology includes automatic variable power module management. The system automatically suspends and engages modules as appropriate, to optimise efficiency both at UPS and system level.

VMMS helps you achieve high efficiency even when UPS load levels are low – typical for redundant UPS systems. VMMS can optimise the load levels of power modules in a single 93PR UPS or in parallel systems, by suspending extra UPS capacity. This means not only greater efficiency at lower load levels, but optimum efficiency at all load levels.

Maximum double conversion efficiency

The 93PR still offers the highest double conversion efficiency in the market, reaching above 96%.



The 93PR 25kW UPM (Uninterruptible Power Module)

Highest power density

The unity power factor maximises the true available power of the 93PR. This means it can deliver up to 20% more real power than other UPSs in its class.


The 200kW frame can house an internal Maintenance Bypass Switch(MBS) or DC breaker

The highly scalable nature of the 93PR means that scaling up in response to increased demand takes minutes rather than hours. Scaling up can also be achieved without increasing the footprint – saving valuable floor space. The modular design allows for internal redundancy, which eliminates the need for an additional UPS for N+1 configurations.

External redundancy also improves scalability, by paralleling up to 8 frames for a total system size of up to 1600 kW.

Maximum Availability

Maximum availability is integral to business continuity, and integral to the design of the Eaton 93PR UPS. It ensures you can always access the power your mission-critical application requires.

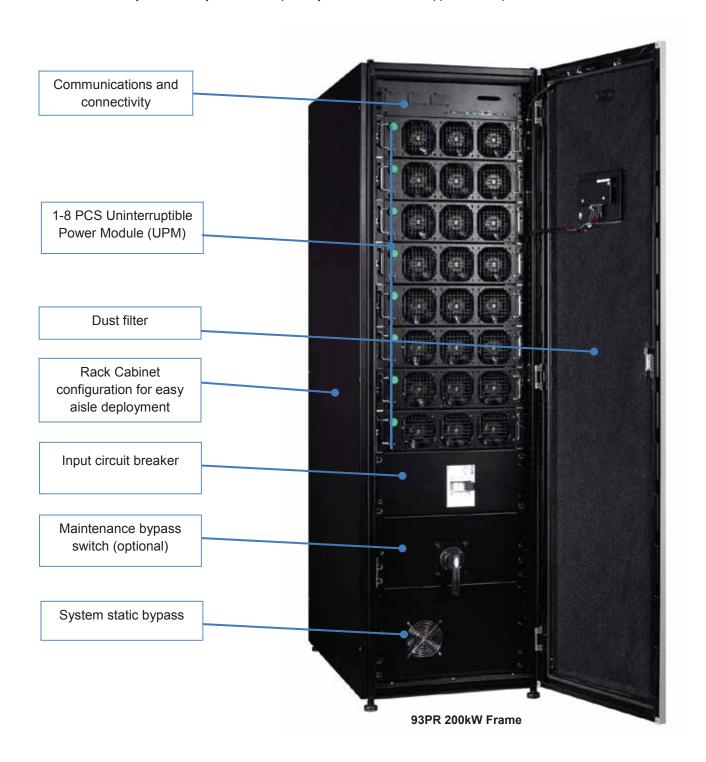

Hot swappable and hot scalable

Due its modular design, a 93PR power module can be replaced or added while another module continues protecting the load. This eliminates the need to go to bypass for module replacement or upgrading (MTTR: 0 minutes). Replacement and upgrade (N+1) operations typically take less than 10 minutes.

Centralised topology

The 93PR's centralised topology is ideal for scalable systems, as it provides full bypass capacity from day one, whereas modular designs with static switches in every power module can have a severe negative impact on the selectivity of the system due to undersized static bypass. This can compromise the availability of the overall system.

Take complete control

Managing and controlling your 93PR UPS is easy. Designed for the most advanced IT environments, the 93PR comes equipped with intuitive user interfaces, a large touchscreen LCD providing useful status information and back logs, and a full suite of power management and connectivity options.

The complete solution

The Eaton 93PR UPS is designed for the most advanced IT environments, and it comes with interfaces for Web and SNMP as standard.

In the event of an alert, the UPS system notifies users and administrators by email. If there's a prolonged power failure, the protected computer systems can be shut down smoothly using the Intelligent Power® Protector software also incorporated with the 93PR.

Your 93PR can be connected directly to your corporate network and the internet. This means you can then monitor and manage your UPS through a standard web browser.

Intelligent, intuitive, integral

The world-class Intelligent Power® Manager intelligent software solution of your 93PR UPS plugs into leading virtualisation management systems, including VMware vCenter, Microsoft SCVMM and Citrix XenCenter.

This user-friendly monitoring tool enables you to monitor and manage your UPS system as an integral part of your power infrastructure. It collects data through the network, then stores it in a database for viewing and analysis.

Information, access, ease of use

Intelligent Power Manager® (IPM) can be used to monitor and manage all Intelligent Power Protectors running in the network. This dramatically reduces the administrator's workload, and minimises the possibility of error.

The web-based interfaces of the Intelligent Power® software simplify usage, by allowing access from any computer in the LAN, as well as remotely via the internet. Power information is consolidated in the same tool used to monitor and manage physical and virtual servers, storage and networks.

In the event of power failure, IPM can trigger protective actions such as live migration of virtual machines, controlled shutdown, or disaster recovery.







Green light bars showing healthy UPS.

LED

light

bars



Red light bars showing alerts on system. Yellow light bars indicate battery and bypass status.

Easy management

The 93PR provides easier access to detailed status information through its large, user-friendly 7" LCD touchscreen interface.

With the 93PR's graphical LCD interface you can track stats on energy savings, battery time, outage tracking, load profiling and much more.

The green/yellow/red LED light-bars make system status visible from a distance in data centres.

Eaton 93PR 125-200 kW Technical Specification sheet as per IEC 62040-3

GENERAL

Ratings	25 kW 50 kW 75 kW 100 kW 125 kW	150 kW 175 kW 200 kW			
Frames Capacity	125 kW Frame	200 kW			
Upgradability	Upto 125 kW	Yes, up to 200kW			
External paralleling	Up to 8 units w ith HotSync technology				
UPS topology	Double conversion				
UPS performance classification	VFI-SS-111				

ENVIRONMENTAL PARAMETER

Ratings	25 kW	50 kW	75 kW	100 kW	125 kW	150 kW	175 kW	200 kW		
Acoustic noise at 1 m, in 25 °C ambient temperature		< 70 dBA in double conversion 55 dBA in ESS								
"Ambient service temperature range"	"0 °C to	0 °C to + 40 °C w ithout output pow er derating"								
Relative humidity range	5 to 95%	5 to 95%, no condensation allowed								
Maximum service altitude	"1000 m (3300 ft) above sea level at 40 °C"									
RoHS/WEEE compliancy	Yes	Yes								

INPUT CHARACTERISTICS

Ratings	25 kW	50 kW	75 kW	100 kW	125 kW	150 kW	175 kW	200 kW	
Rated input voltage	220/380	V; 230/4	00 V; 240/	415 V					
Voltage tolerance Rectifier input	305 to 4	78 V							
Voltage tolerance Bypass input	rated vo	ltage -15%	% / +10%						
Rated input frequency Frequency tolerance	50 or 60	Hz, user o	configurab	le 40 to 72	! Hz				
"Number of input phases"	"3 phase	s + neutra	al"						
Input power factor, double conversion 100% load	> 0.99								
Rated input r.m.s. current									
380V	199 A	99 A 318 A							
400V	189 A					302 A			
415V	182 A					291 A			
Maximum input r.m.s. current									
Input current distortion at rated input current	"<3%,1	00% load							
In-rush current	6 x Rate	d Peak Cu	rrent for 2	0 Msec					
Genset Compatibility	1.5 x Rat	ted UPS C	apacity						
Rectifier ramp-up, rectifier start and load step	"5 A/s (d	"5 A/s (default), configurable. Minimum 1 A/s."							
Minimum Short Current Power Capacity	25 x Rate	ed UPS Ca	apacity fo	r 20 Msec					

BYPASS CHARACTERISTICS

Ratings	25 kW	50 kW	75 kW	100 kW	125 kW	150 kW	175 kW	200 kW
Type of bypass	Static							
Bypass rating	125 kW					200kW		
Bypass voltage range		0 V; 230/ e -15% /						
Transfer time break			chronized er Unsynch					
Maintenance bypass	Inbuilt 8	without	both avail	able			& without vailable	:
Bypass thyristor i2t value	120 kAm	nps						

COMPLIANCE WITH STANDARDS

Ratings	25 kW	50 kVV	75 kW	100 kW	125 kW	150 kW	175 kW	200 kW	
Safety Access as per IEC 62040-1	Restricte	ed access							
Degree of protection as per IEC 62040-1	IP 20; protection against medium sized foreign matter (incl. finger), protection against vertically dripping water								
Electromagnetic Compatibility Immunity Emissions as per IEC 62040-2	EMC Cat	egory C3	EMC Cate	gory C3					

MECHANICAL PARAMETER

Ratings	25 kW	50 kW	75 kW	100 kW	125 kW	150 kW	175 kW	200 kW		
UPS dimensions (W x D x H)	603 x 10	603 x 1013 x 2050 mm 903 x 1013 x 2050 r								
Weight, UPS frame w /o UPM	425 kg	25 kg								
Weight, UPM (power module)	28 kg (<	8 kg (< 25 kg w /o fan panel & DC capacitors)								
UPS Cable entry	Rear top	Rear top & rear bottom								
UPS Degree of protection	IP 20									
UPS colour	Black; R	Black; RAL 9005								
Mean Time To Repair (MTTR)	< 10 min	utes								

EFFICIENCY & HEAT DISSIPATION

Ratings	25 kW	50 kW	75 kW	100 kW	125 kW	150 kW	175 kW	200 kW
Efficiency in double-conversion, rated linear load								
100% load	95.6%					95.7%		
75% load	96.1%					96.1%		
50% load	96.3%					96.3%		
25% load	95.7%					95.7%		
Heat dissipation (watt) in double conversion								
100% load	5753					9205		
75% load	4008					6413		
50% load	2536					4058		
25% load	1473					2356		
Efficiency in ESS, rated linear load								
100% load	99.3%							
75% load	99.3%							

OUTPUT CHARACTERISTICS

Ratings	25 kW	50 kW	75 kW	100 kW	125 kW	150 kW	175 kW	200 kW		
Number of output phases	3 phases	+ neutra								
Crest factor	3									
Rated output voltage	220/380	V; 230/4	00 V; 240,	'415 V, co	nfigurable)				
Voltage unbalance at reference unbalanced load	< 0,1%									
Phase Displacement at reference unbalance load	<+/-3,0°	+/-3,0°								
Rated output frequency Output frequency variation Slew rate		'50 or 60 Hz, configurable ⊵ 0,1 Hz 0.8 - 1 Hz/s"								
Rated output power	125 kW/	125 kVA				200 kW/	200kVA			
Overload capability On inverter	60 sec 1	"10 min 102-110% load @ Unity PF Load 60 sec 111-125% load @ Unity PF Load 10 sec 126-150% load @ Unity PF Load "								
"Load power factor Rated Permitted range"	"1.0 0.8 laggi	ng to 0.8	leading"							

BATTERY CHARACTERISTICS

Ratings	25 kW	50 kW	75 kW	100 kW	125 kW	150 kW	175 kW	200 kW		
Battery technology	12 V, VR	12 V, VRLA/Lithium ION								
Battery quantity	36 to 44	36 to 44 blocks, 216 to 264 cells per battery string 400Vdc minimum cut-off								
Battery voltage	432 to 52	432 to 528 V, default								
Charge current limit		Default 5A, configurable, maximum 25A per UPM with derating to 60% Capacity with Charger current increamental								
Battery start option	Yes									

COMMUNICATION CIRCUITS

Ratings	25 kW	50 kW	75 kW	100 kW	125 kW	150 kW	175 kW	200 kW	
Standard connectivity ports	"3 Mini-slot ports for optional cards, USB, RS-232 service port, relay output, 5 building alarm inputs and a dedicated EPO Web and SNMP card"								
Complete list of indications and interface devices	See Use	r's and Ins	stallation	Guide					

Eaton is dedicated to ensuring that reliable, efficient and safe power is available when it's needed most. With unparalleled knowledge of electrical power management across industries, experts at Eaton deliver customised, integrated solutions to solve our customers' most critical challenges. Our focus is on delivering the right solution for the application. But, decision makers demand more than just innovative products. They turn to Eaton for an unwavering commitment to personal support that makes customer success a top priority.

For more information, visit www.eaton.com/powerquality





India Head Office

Eaton Power Quality Pvt. Ltd.
2, EVR Street, Sedarpet
Industrial Estate
Pondicherry-605111
Tel: +91 413 2672000
Enquries - EatonElectricalIndia@eaton.com

Sales and Service Toll Free Hotline: 1800 425 5758

www.eaton.com

© 2020 Eaton Corporation All Rights Reserved India